





MORE THAN WHAT MEETS THE EYES









AN INWARD JOURNEY

Windows and doors are more than the outwardly material and structure that shape them. They come with a soul that can let the goodness in and keep the unwanted out. Simply put, they offer you a lifetime of goodness, if designed and made to do so. Inspired by the inherent beauty of windows and doors, Spalva started taking one small step at a time towards exploring their full potential and eventually realizing it.

In the process, Spalva transformed from a steel fabricator into a world-class windows and doors manufacturer and marketer with a range at par and even better than any international brand.





A DIFFERENT PERSPECTIVE

With a continuously upgraded manufacturing facility at Pune, Spalva is redefining and redesigning homes and workplaces with some never-before seen and heard features of windows and doors.

Our endeavor is to bring out all that's good in windows and doors; be it the aesthetics, the functioning, or the utility.

With over four decades in the industry and market, we have perfected the art and technology of windows and doors making by combining Indian sensibilities with best global practices. And the result is for you to see and feel at our show office or hear from the exponentially growing number of customers.














Raising benchmarks and sights

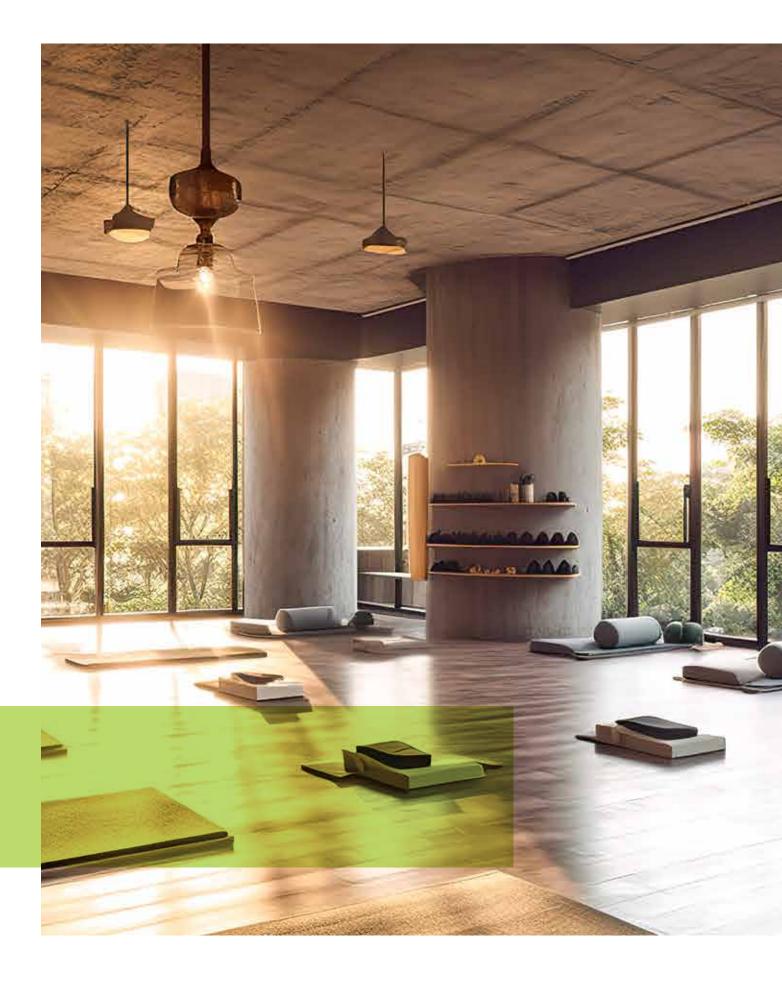



THE SPALVA ADVANTAGES



Weather Proof Water Proof



Fire Resistant

P

Environment

Friendly

Maintenance-

free

Dust Proof

Sun

Easily Washable



Fast Installation



Sound Insulation



Track Gap Cover



Extra-high UV Resistant




100% Lead-free

Matching Colour Locks





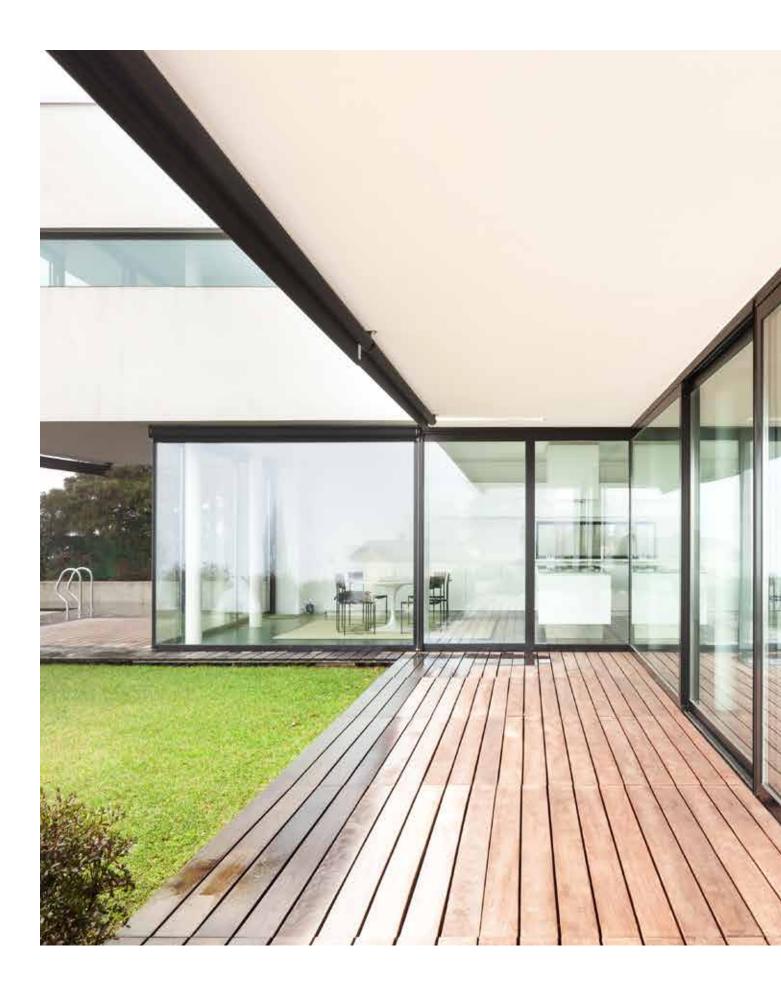





L-SHAPE CORNER SLIDING WINDOWS

Technical Characteristics

Profiles Aluminium Alloy 6063-T6 Grade

Facility No Middle Column Required

Option

Fly Mesh Option Available. Shutter Size Maximum W-1800 X H-2400 Track Sections 2/3/4/5 Track

Maintenance Track - Easy to Clean

Vibration

Rollers of Needle Bearings with Polyamide Nylon Casing for Smooth & Silent Sliding

Weather

Silicon-base Weather Strips which Restrict Dust, Sound & Rain from Entering in

Glazing

Single Glass 4/5/6/8/10 mm Double Glass 18 mm (4+10+4), 18 mm (5+8+5), Laminated 4+1.5+4, Laminated 5+1.5+5 Glass Sealing High Quality EPDM

Option

Fly Mesh S.S. / Aluminium with S.S. Finish / Georgian Bar / MS Grill

Security

Lock Self Pressing / Manual / Handle Locks / Key Lock / Child Lock

Specifications Wind Resistance 2200 Pa Sound Reduction 35 dB (DGU 18 mm)

Finishing Powder Coated / Anodized / Wooden Finish

Colours # All RAL Colour Shades Available

The Spalva Advantages



Weather Proof

Fire

Resistant

Water



Proof




Environment Friendly

Easily Washable

Sound

Insulation

16

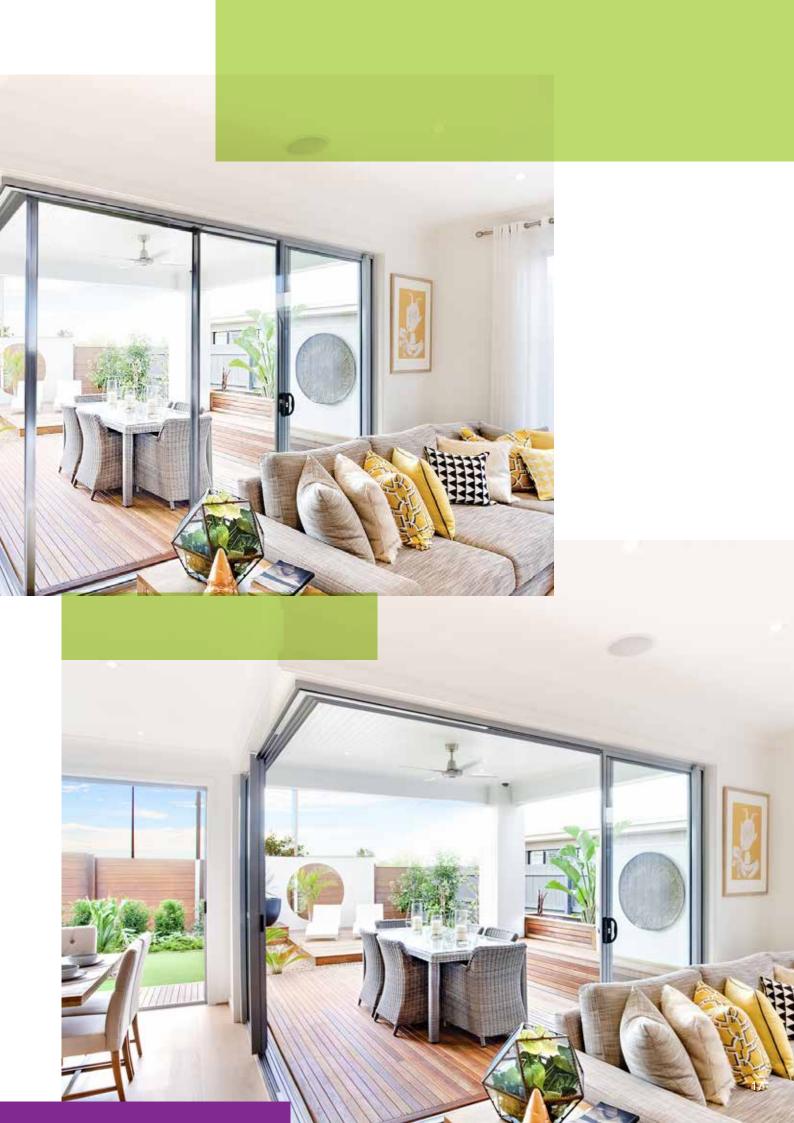







Weather Proof



er

Water Proof

[]))

Sound Insulation



Fire Resistant



Environment Friendly



Easily Washable

Technical Characteristics

Profiles

Aluminium Alloy 6063-T6 Grade Shutter Sections 27 x 68 mm Shutter Size Maximum W-1800 X H-2400 Track Sections 2/3/4/5 Track Duct at the Bottom of the Track to Drain Out Rainwater

Maintenance Track - Easy to Clean

Vibration Rollers of Needle Bearings with Polyamide Nylon Casing for Smooth & Silent Sliding

Weather

Silicon-base Weather Strips which Restrict Dust, Sound & Rain from Entering in

Glazing

Single Glass 4/5/6/8/10 mm Double Glass 18 mm (4+10+4), 18 mm (5+8+5), Laminated 4+1.5+4, Laminated 5+1.5+5 Glass Sealing High Quality EPDM

Option

Fly Mesh S.S. / Aluminium with S.S. Finish / Georgian Bar / MS Grill

Security

Lock Self Pressing / Manual / Handle Locks Key Lock / Child Lock

Specifications

Wind resistnce 2200 Pa Sound Reduction 35 dB (DGU 18 mm)

Finishing Powder Coated / Anodized / Wooden Finish

Colours # All RAL Colour Shades Available

BLUESHIELD SLIMLINE SERIES

BLUESHIELD SLIMLINE SERIES

Technical Characteristics

Track Sections 2/3/4/5 Track.

Maintenance Specifications

Profiles

Option

Shutter Section Sector 9/2688 Pam / Shon Gine 25 mm

Key Lock / Child Lock

Shutter Size Maximum W-1800 X H-2400.

Track - Easy to Clean Wind Resistance 2200 Pa

Aluminium Allo Flodes hes ad luminium with S.S. Finish /

Sound Reduction 35 dB (DGU 18 mm)

Nylon Casing for Store to at Silent Side / Wooden Finish

Technical Characteristics

Profiles

Aluminium Alloy 6063-T6 Grade Shutter Sections 27 X 68 mm Slimline 25 mm Shutter Size Maximum W-1800 X H-2400 Track Sections 2/3/4/5 Track Duct at the Bottom of the Track to Drain Out RaiDwater the Bottom of the Frack to Drain Out Rain Water.

Maintenance

Track - Easy to Clean

Vibration

Rollers of Needle Bearings with Polyamide Nylon Casing for Smooth & Silent Sliding

Weather Sound & Rain from Entering in

Colours Weather Silicon Base Weather Strip which Restrict Dust, Silicon Base W#ahler Strip and Base Strip and St Sound & Rain to Come Inside.

Rollers of Need Barrings with Polyamide

Option

Fly Mesh S.S. Georgian Bar

Security Lock Self Pres Key Lock / Ch

Specification Wind resistnce Sound Reduct

Finishing Powder Coatir

Colours # All RAL colo

Glazing

Glazing Single Glass 4/5/6/8/10 mm Single Glass 4/5/6 Double Glass 18 mm (4+10+4), 18 mm (5+8+5), Double Glass 18 n Laminated 4+1.5+4, Laminated 5+1.5+5 Glass Sealing High Quality EPDM

Vibration

Laminated 4+1.5+ **Glass Sealing High**

The Spalva Advantages



Weather Proof



Fire Resistant



Water Proof



Environment Friendly





SoulMeather Insulationoof




EasilyFire Washappistant





20

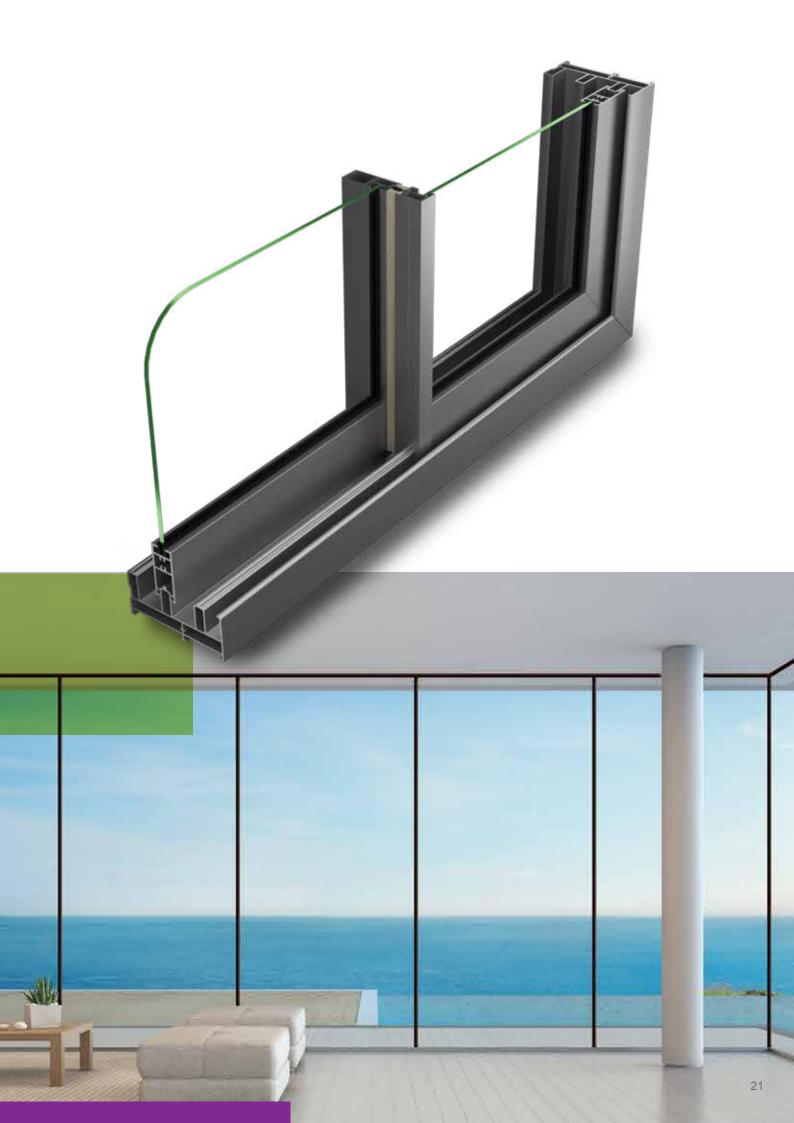

SPALVA SERIES

Technical Characteristics

Profiles

Aluminium Alloy 6063-T6 Grade Shutter Sections 25 X 50 mm Shutter Size Maximum W-1500 X H-2100 Track Sections 2/3/4 Track Duct at the Bottom of the Track to Drain Out Rainwater.

Maintenance

Track - Easy to Clean

Vibration

Rollers of Needle Bearings with Polyamide Nylon Casing for Smooth & Silent Sliding

Weather

Silicon Base Weather Strip which Restrict Dust, Sound & Rain from Entering in

Glazing

Single Glass 4/5/6/8/10 mm Double Glass 18 mm (4+10+4), 18 mm (5+8+5), Laminated 4+1.5+4, Laminated 5+1.5+5 Glass Sealing High Quality EPDM

Option

Fly Mesh S.S. / Aluminium with S.S. Finish / Georgian Bar / MS Grill

Security

Lock Self Pressing / Manual / Handle Locks / Key Lock / Child Lock

Specifications Wind Resistance 2200 Pa Sound Reduction 35 dB (DGU 18 mm)

Finishing Coating - Powder Coated/ Anodized / Wooden Finish.

Colours # All RAL Colour Shades Available.



The Spalva Advantages





Weather Proof



Fire Resistant



Proof

Environment


Friendly

Sound Insulation



Easilv Washable



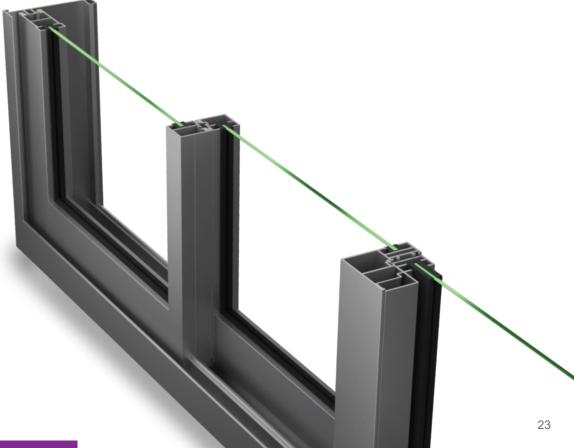



Technical Characteristics

Facility

Vertical Sliding Stops at the Point of Choice

Profiles

Aluminium Alloy 6063-T6 Grade Shutter Sections 20 X 50 mm Window Size Maximum W-900 X H-1800

Maintenance Track - Easy to Clean


Vibration Rollers of Needle Bearings with Polyamide Nylon Casing for Smooth & Silent Sliding.

Weather Silicon-base Weather Strips which Restrict Dust, Sound & Rain from Entering in

Glazing Single Glass 4/5 mm. Glass Sealing High Quality EPDM

Option Fly Mesh S.S. / Aluminium with S.S. Finish

Finishing Coating - Powder Coated / Anodized / Wooden Finish

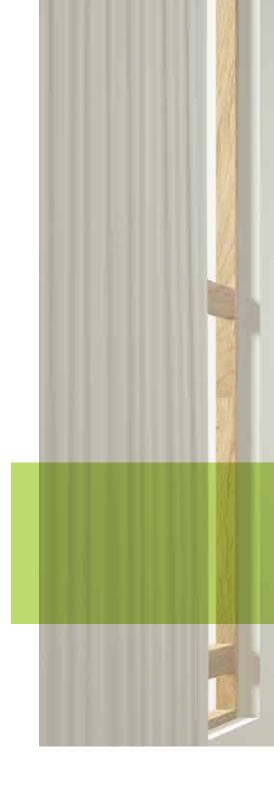

The Spalva Advantages



Weather Proof



Water

Proof

Sound Insulation



Fire Resistant



Environment Friendly



Easily Washable







Technical Characteristics

Facility Single Shutter / Double Shutter

Size Section Size - 45/85 mm

Hinges With Stay Hinges / Butt Hinges

Glass Glass Thickness Single Unit 4/5/6 mm Double Glass Unit 18 mm (4+10+4) Glass with Georgian Bar Size Shutter Size Maximum W-1200 X H-1800

Security Key Lock / Child Lock

Mesh Rolling Mesh / Plated Mesh

Finishing Coating - Powder Coated / Anodized / Wooden Finish

Colours # All RAL Colour Shades Available

The Spalva Advantages





Weather Proof

Water Proof



Sound Insulation



Fire Resistant




Environment Friendly



Easily Washable



OPENABLE WINDOWS WITH MS GRILL AND ROLLING MESH

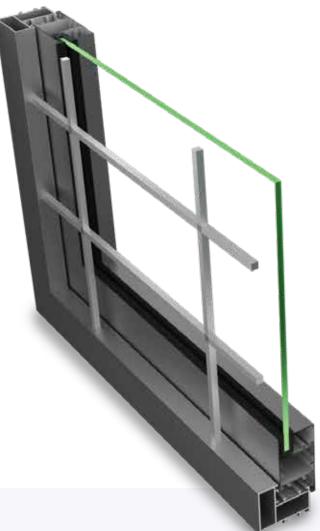

Technical Characteristics

Facility MS Grill and In-built Rolling Mesh

Size Section Size - 45/85 mm

Hinges With Stay Hinges / Butt Hinges

Glass Glass Thickness Single Unit 4/5/6 mm Double Glass Unit 18mm (4+10+4)

Size Shutter Size Maximum W-1200 X H-1800 **Option** MS Grill / Georgian Bar

Security Key Lock / Child Lock

Mesh Rolling Mesh / Plated Mesh

Finishing Coating - Powder Coated / Anodized / Wooden Finish

Colours # All RAL Colour Shades Available







Weather Proof

Water Proof

[]))

Sound

Insulation



Fire Resistant



Environment Friendly



Easily Washable



Technical Characteristics

Facility Seamless Windows

Size Section Size - 45/85 mm

Hinges With Stay Hinges / Butt Hinges

Glass Glass Thickness Single Unit 4/5/6 mm Double Glass Unit 18 mm (4+10+4)

Option Georgian Bar Security Key Lock / Child Lock

Mesh Rolling Mesh / Plated Mesh

Finishing Coating - Powder Coated / Anodized / Wooden Finish

Colours # All RAL Colour Shades Available





Weather Proof



Water Proof

L_____

Sound Insulation

)))



Fire Resistant



Environment Friendly



Easily Washable

SERIES

Technical Characteristics

Profiles Aluminium Aloy 6063-T6 Grade

Shutter Section Slim Shutter - 20 mm Heavy Shutter - 75 mm Maximum Shutter Size 900 mm X 2700 mm Track Section - With Bottom Section / Without Bottom Section

Vibration Rollers of Needle Bearings with Polyamide Nylon Casing for Smooth & Silent Sliding

Glazing

Single Glass - 5/6/8/10 Double Glass - 18 mm (4+10+4), DGU 18 mm (5+8+5), Laminated (4+1.5+4), Laminated (5+1.5+5), Laminated (6+1.5+6) Glass Sealing - High Quality EPDM

Option Plated Mesh, Blackout Mesh

Security Handle Lock with Key

Specifications Wind Reistance - 2200 pa Sound Resistance - 35 dB (DGU 18mm)

Finishing Coating - Powder Coated / Anodized / Wooden Finish

Colours # All RAL Colour Shades Available







Weather Proof



\

Water Proof



Sound Insulation



Fire Resistant



Environment Friendly



Easily Washable

SLIDING FOLDING SLIMLINE SERIES

Technical Characteristics

Profiles Aluminium Aloy 6063-T6 Grade

Shutter Section Slim Shutter - 20 mm Heavy Shutter - 75 mm Maximum Shutter Size 900 mm X 2700 mm Track Section - With Bottom Section / Without Bottom Section

Vibration Rollers of Needle Bearings with Polyamide Nylon Casing for Smooth & Silent Sliding

Glazing

Single Glass - 5/6/8/10 Double Glass - 18 mm (4+10+4), DGU 18 mm (5+8+5), Laminated (4+1.5+4), Laminated (5+1.5+5), Laminated (6+1.5+6) Glass Sealing - Heigh Quality EPDM

Option Plated Mesh / Blackout Mesh


Security Handle Lock with Key

Specifications Wind Resistance - 2200 pa Sound Resistance - 35 dB (DGU 18mm)

Finishing Coating - Powder Coated / Anodizeding / Wooden Finish.

Colours # All RAL Colour Shades Available.



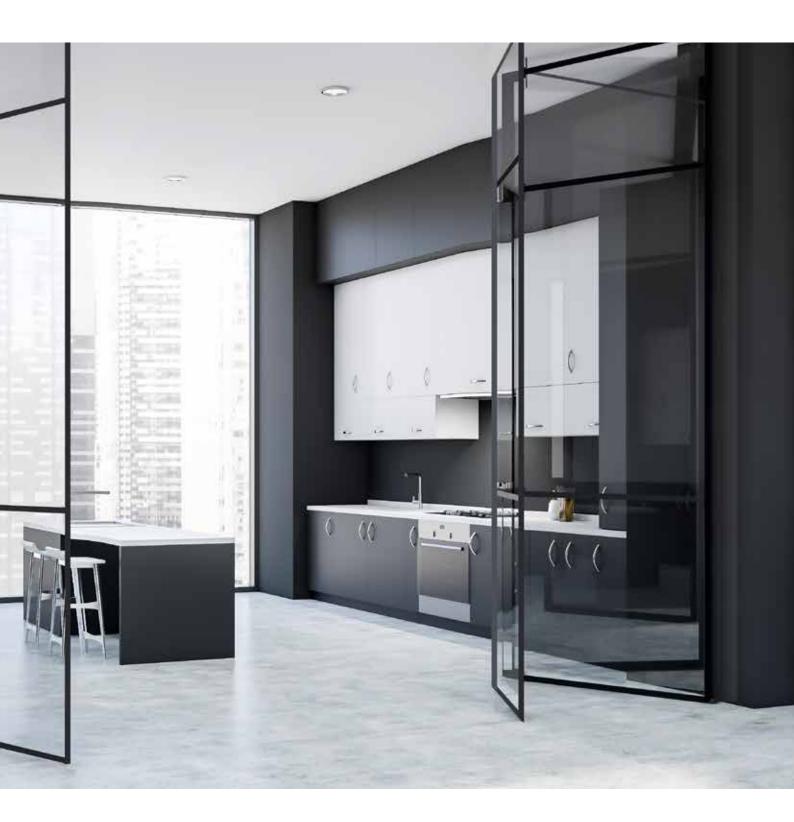





Weather Proof

Water Proof



Sound Insulation




Fire Resistant



Environment Friendly



Easily Washable

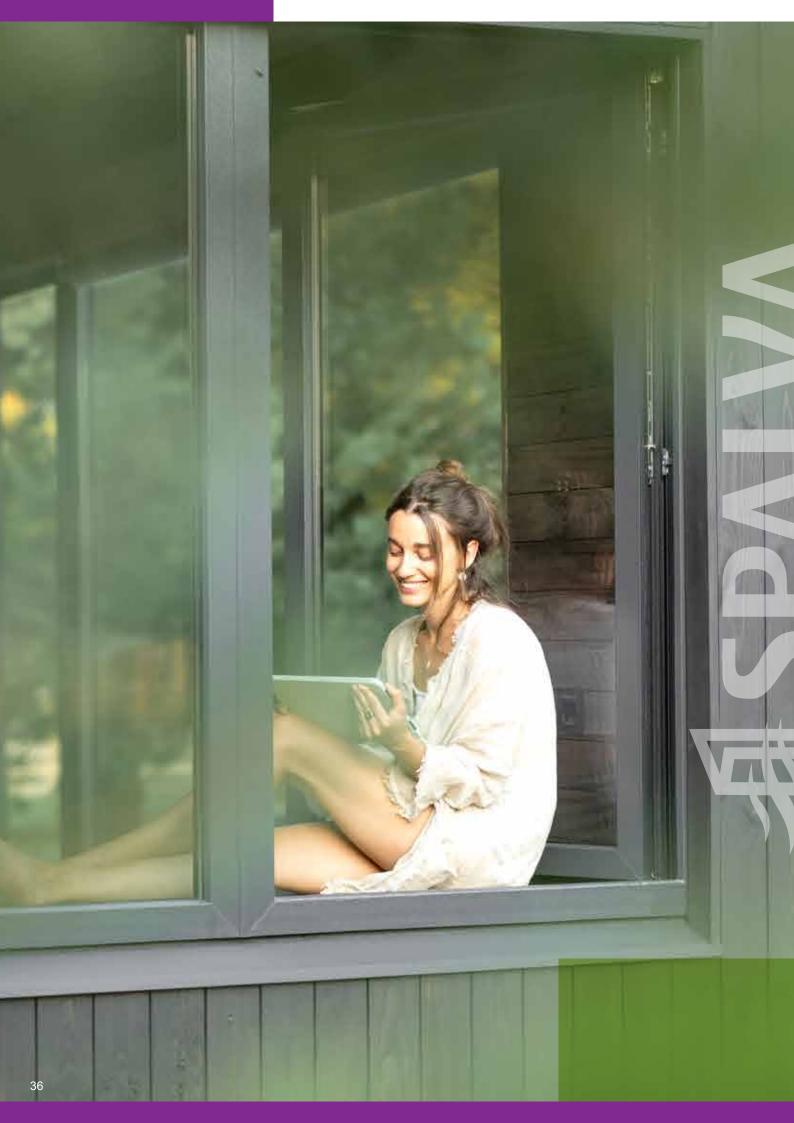

VARIETY OF LOCKS



Casement Lock



Manual Lock with Key Lock



Handle Lock with Key



Latch Lock



Clutch Lock with Child Lock



Push Lock



Self Pressing Lock

NOW A SPECIAL FEATURE ADDED TO THE MOST PREFERRED WINDOWS COLOUR OF THE LOCK MATCHES THE COLOUR OF THE WINDOW









Our Designs Extruded by

Jindal Aluminium

Premium Surface Finish Experts



Showroom: 3rd Floor, Saraswat Bank Building, Lohia Jain House, 893/6, Goodluck Chowk, Bhandarkar Road, Deccan Gymkhana, Pune - 411004. Maharashtra, India.

Customer Care: +91 7745077177 | info@spalva.co.in | www.spalva.co.in